

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.

THIS PAGE BLANK (USPTO)

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| (51) International Patent Classification ⁷ : H04N 7/16 | A1 | (11) International Publication Number: WO 00/16554 (43) International Publication Date: 23 March 2000 (23.03.00) |
|---|-----------|--|

(21) International Application Number: PCT/IB99/01584

(22) International Filing Date: 16 September 1999 (16.09.99)

(30) Priority Data:
98402290.5 16 September 1998 (16.09.98) EP

(71) Applicant (for all designated States except US): CANAL+ SOCIETE ANONYME [FR/FR]; 85/89, quai André Citroën, F-75711 Paris Cedex 15 (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): CHOLETTE, Denis [FR/FR]; 8, rue Violet, F-75015 Paris (FR). LIAO, Hongtao [FR/FR]; 4, rue du Canal, F-78180 Montigny-Btx (FR).


(74) Agents: COZENS, Paul, Denis et al.; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: MANAGEMENT OF DATA IN A RECEIVER/DECODER

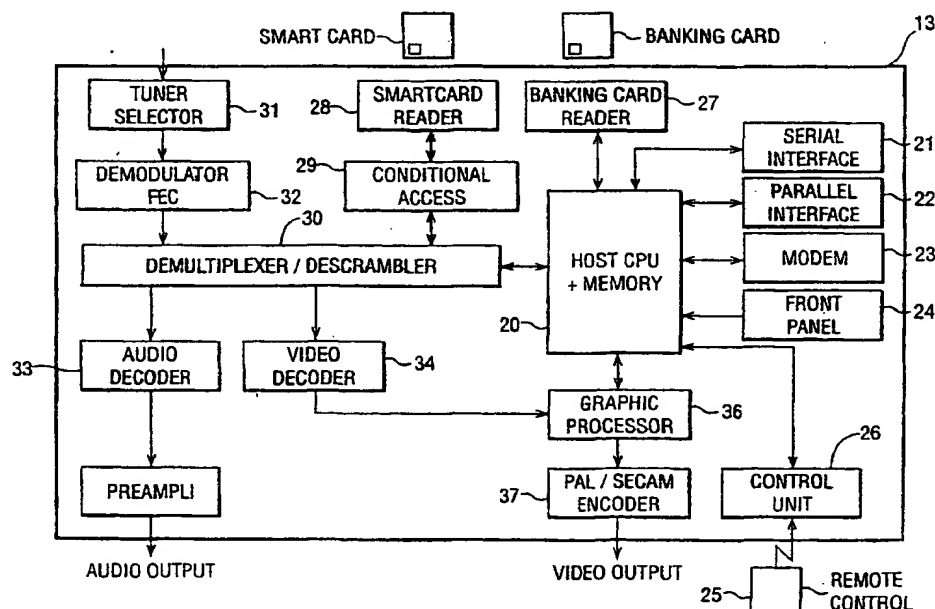

(57) Abstract

In order to restrict data access in a receiver/decoder, a plurality of sets of access rights are assigned to the data, each set of access rights being assigned to at least one party. The data, the sets of access rights and an identifier for each party are stored in a memory of the receiver/decoder. The identifier of a party requesting access to the data is compared with the or each identifier stored in the memory, and the party provided with the set of access rights assigned thereto in the memory of the receiver/decoder.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LJ | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

MANAGEMENT OF DATA IN A RECEIVER/DECODER

The present invention relates to the management of data. In particular, the invention relates to the following aspects of managing data, for example, in a receiver/decoder:

- recording the arborescence of data stored as files and directories in a memory;
- transferring blocks of data between pages of memory to enable fresh data to be stored in the memory; and
- restricting data access in a receiver/decoder.

The term "receiver/decoder" used herein may connote a receiver for receiving either encoded or non-encoded signals, for example, television and/or radio signals, which may be broadcast or transmitted by some other means. The term may also connote a decoder for decoding received signals. Embodiments of such receiver/decoders may include a decoder integral with the receiver for decoding the received signals, for example, in a "set-top box", such a decoder functioning in combination with a physically separate receiver, or such a decoder including additional functions, such as a web browser, a video recorder, or a television.

In a broadcast digital television system, received signals are passed to a receiver/decoder and thence to a television set. As used herein, the term "digital television system" includes for example any satellite, terrestrial, cable and other system. The receiver/decoder may decode a compressed MPEG-type signal into a television signal for the television set. It may be controlled by a remote controller handset, through an interface in the receiver/decoder. The receiver/decoder is used to process the incoming bit stream, and may include a variety of application modules which cause the receiver/decoder to perform a variety of control and other functions.

The term MPEG refers to the data transmission standards developed by the International Standards Organisation working group "Motion Pictures Expert Group" and in particular but not exclusively the MPEG-2 standard developed for digital television applications and set out in the documents ISO 13818-1, ISO 13818-2, ISO

13818-3 and ISO 13818-4. In the context of the present patent application, the term includes all variants, modifications or developments of MPEG formats applicable to the field of digital data transmission.

5 Such a receiver/decoder as described above may have a variety of devices coupled to it, such as a card reader for the user to pass an authorization card through to confirm which services the user is authorized to use, a hand-held television receiver control wand, a television display unit, and a second card reader for use with bank cards to allow the user to perform home banking functions. It may also have a variety of ports
10 coupled to it, for example, a modem for access to the Internet and for conducting home banking transactions.

With reference to Figure 1, the receiver/decoder includes a central processor 50 and associated memory volumes 54, 56 and 58. The memory volumes may be coupled
15 directly to the central processor 50, or, as shown in Figure 1, may be coupled to the central processor over a bus 52.

A variety of types of memory volumes are available. One major distinction between different kinds of memory volume is between volatile and non-volatile memory.
20 Volatile memory retains its contents only while power is supplied to the memory, losing its contents as soon as its power supply is disconnected, while non-volatile memory retains its contents indefinitely even if its power supply is disconnected. The other major distinction is between writable memory and read-only memory.

25 Volatile memory is generally known as RAM, while there are various kinds of non-volatile memory. RAM is normally writable, while read-only memory is known as ROM. This latter distinction is not necessarily hard-and-fast. Any memory must of course be writable in some sense at least once, but some kinds of ROM-like memory can have their contents changed, albeit with some difficulty. Thus there are
30 memory types such as EEPROM (electrically erasable programmable read-only memory); and Flash memory.

The different kinds of memory have different characteristics (for example, different read times and different costs), so it is often desirable to use a combination of several different kinds in a single receiver/decoder, as illustrated in Figure 1.

5 Figure 2 illustrates the organisation of data in a memory volume. The data is arranged in an arborescent arrangement of directories D and files F. As discussed in more detail below, each directory containing a list of addresses or pointers to addresses for all of the files and/or directories associated with that directory for tracing the arborescence of the contents of the data.

10

The arborescence of the data organisation can be thought of in terms of the various generations of a genealogical family tree, being made up of "sons" and "fathers". Each "father", that is, each directory, contains an address for each of its "sons", that is, the files and/or directories which are associated with that directory.

15

For example, with reference to Figure 2, directory D6 contains an address for its son, file F6. Directory D5 contains addresses for its sons, directory D5 and file F5. Directory D2 contains addresses for each of its sons, D3, D4 and D7.

20 The arborescent arrangement of directories and files is constantly being reorganised by the central processor 50, for example, if a file is moved between directories and its address changed. When a file, such as file F5, is moved from directory D5 to directory D6 so that the arborescence of the data changes, then the directory from which the file was previously directly descended, that is, D5, and the directory from
25 which the file is now directly descended, that is, D6 must be modified for correct location of the file.

Thus, changing the arborescence of the data when the file is moved is a two-step process. Figure 3(a) illustrates a first process for changing the arborescence of the data
30 in a memory volume. In step 1, an address for file F5 is written in directory D6, and in step 2 the address for file F5 is deleted from directory D5. Figure 3(b) illustrates a second process for changing the arborescence of the data in a memory volume. In

step 1, the address for file F5 is deleted from directory F5, and in step 2 the address for file F5 is written in directory D6.

5 In both of these processes, if the operating system were to crash between steps 1 and 2, then the arborescence of the data is no longer accurately recorded. In the first process, the arborescence would be as shown in Figure 3(a)(ii), with addresses for file F5 being stored in both directories D5 and D6. In other words, file F5 has two fathers. In the second process, the arborescence would be as shown in Figure 3(b)(ii), with neither directory D5 nor directory D6 storing an address for file F5. In other words, file F5 is an "orphan".

10 The present invention seeks in one aspect to provide an improved system for tracing the arborescence of data in a memory volume which can reduce the time required to update the arborescence when a file moves and which can provide increased reliability.

15 In a first aspect, the present invention provides a method of recording the arborescence of data stored as files and directories in a memory, said method comprising the step of storing in association with each file and directory an identifier of the directory, if any, immediately preceding that file or directory in the arborescence of the data.

20 This can provide for faster recording of the arborescence of the data, as each file or directory contains an identifier of the immediately preceding directory, and not identifiers of the directories and files which immediately follow the directory in the arborescence, as is conventional. Thus, the number of directories or files which must be modified when the arborescence of the data changes can be significantly less than in the conventional system; it is only necessary to change the identifier of the "father" stored in a "son", a one-step process, when the address location of the son is changed. This is particularly useful in memory volumes where writing data is particularly time-consuming, such as Flash memory.

30 As the modification of the arborescence when a file or directory is moved is a one-step process, the problems associated with two-step processes, as identified above, can

be avoided.

The identifier preferably comprises a unique code assigned to the directory. Thus, the arborescence can be quickly changed by reading the code assigned to the new "father" when a file or directory is moved, and storing this code in the file or directory.

The identifier may be stored in a header of the file or directory. This provides for a convenient location of the file or directory in the arborescence of the data.

At least part of the data may be stored in a Flash memory volume. Thus, the data may be "spread" across two or more memory volumes, for example, across a Flash memory volume and a ROM memory volume. The data may also be stored in the aforementioned manner exclusively in a Flash memory volume. If at least part of the data is stored in a Flash memory volume, a virtual arborescence of that part of the data is preferably recorded in a RAM memory volume, and a header of a file is preferably stored in a dedicated block of Flash memory. The memory volumes may be provided in a receiver/decoder.

Preferably, the stored identifier is changed when a file or directory is moved to immediately precede another directory. This provides for quick modification of the arborescence of the data when a file is moved.

In a related aspect, the present invention provides apparatus for recording the arborescence of data stored as files and directories, said apparatus comprising means for storing in association with each file and directory an identifier of the directory, if any, immediately preceding that file or directory in the arborescence of the data. The storage means may be embodied by a central processor. The storage means may be adapted to store the identifier in a header of the file or directory.

The apparatus may be provided in combination with a Flash memory volume and a RAM memory volume. If so, the apparatus may further comprise means for recording

in the RAM memory volume the arborescence of data stored in the Flash memory volume. The recording means may be conveniently provided by the central processor.

5 The apparatus may further comprise means for changing the stored identifier when a file or directory is moved to immediately precede another directory. The changing means may also be conveniently provided by the central processor.

This aspect of the invention also provides a receiver/decoder comprising apparatus as
10 aforementioned.

Flash memory is generally ROM-like, in that it is non-volatile. It is also intended to be used in a generally ROM-like manner, being read from but not written to. However, Flash memory can be written to, but only with some difficulty. Specifically,
15 Flash memory is normally divided into pages, typically each of many kilobytes in length. Changing one or more bits in a page of Flash memory from 0 to 1 can only be performed by erasing the page. In more detail, to re-use a block of Flash memory, an entire page has to be erased so that new data can be written in that block.

20 The information in Flash memory is organized into blocks of substantial size. A block may comprise data, for example, tables of permanent or semi-permanent information, or a program or sub-routine. The block sizes will normally be chosen to be less than the page size (if a block is larger than a page, it will usually be feasible to split it into sub-blocks which are less than the page size).

25 Typically, when Flash memory is updated it is desirable to retain some of the information already in it. This therefore requires the page being updated to be read into RAM to form an image of the page; this image in RAM can then be updated by inserting whatever new information is to be entered into the page. At the same time, any information in the page which is no longer required can be deleted. The updated
30 image can then be written back into Flash memory.

To enable the blocks of Flash memory to be searched for using some kind of name

or descriptor, some sort of block locating or addressing data structure must be maintained. To enable the blocks to be searched, it is known to maintain a separate block locating data structure for each page of the Flash memory. A block locating data structure is held at least partially in an external memory outside the Flash memory itself, such as in an EEPROM memory.

It has been realized pursuant to the present invention that with this block locating data structure updating of the Flash memory is required for every change in its contents. To write a fresh block requires Flash memory updating; deletion of a block similarly requires updating. Although it is not necessary to physically delete the block, the block locating data structure has to be updated to indicate that the block is no longer valid.

Such a system for updating Flash memory has a number of drawbacks. First, an entire page of the Flash memory must be copied into RAM memory to enable fresh data to be stored in the Flash memory. Therefore, it is necessary to have a buffer in the RAM memory which is the same size as a page of Flash memory. Secondly, it is essential to have an EEPROM memory volume for storing the block locating data structure for identifying the location and status of blocks stored in the Flash memory.

The present invention seeks, in a second aspect, to provide an improved system for updating the contents of a Flash memory volume which does not require the use of ROM or RAM memory to effect updating.

In a second aspect, the present invention provides a method of transferring blocks of data between pages of memory to enable fresh data to be stored in said memory, said memory comprising a plurality of pages, one page of said memory being designated as a source page comprising at least one valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory being designated as a transfer page, the method comprising the step of:

copying the or each valid block from the source page into said transfer page, at least one such block having a position in said transfer page different from its

position in the source page; and
erasing the source page.

5 By altering the position of at least one valid block, the valid blocks may be arranged together, for example, at one end, such as the start, of the transfer page. This can enable sufficient room for storing the fresh data to be left at the other end of the transfer page.

10 Preferably, the or each valid block is copied into the transfer page in such a manner as to create the largest unfragmented memory area in the transfer page for receiving the fresh data.

15 Thus, this aspect of the present invention also provides a method of storing data in memory, said memory comprising a plurality of pages, one page of said memory comprising a source page comprising at least one valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory being designated as a transfer page initially comprising only free blocks, the method comprising the steps of:

20 copying the or each valid block from the source page into said transfer page, at least one such block having a position in said transfer page different from its position in the source page;

erasing the source page; and

storing the data in said transfer page.

25 Preferably, the erased source page is redesignated as a new transfer page. This can enable the aforementioned methods to be repeated when further data is to be stored in the memory. This redesignation is preferably conducted immediately after the source page has been erased.

30 In one preferred embodiment, a page is designated as the source page in dependence on the cumulative size of the invalid blocks of the page. For example, the designated source page may be a page having at least one invalid block having a cumulative size

equal to or greater than the size of the fresh data. This can ensure that there will be sufficient room for storing the data in the transfer page once the copying of the valid blocks to the transfer page has been completed.

- 5 The blocks may have a variable size. This provides a number of advantages over the use of blocks of fixed size. Fixed blocks typically have a size of 5kbytes. If data having a size of 3kbytes is to be stored in a fixed block, 2kbytes of memory would be effectively wasted. By using a block of variable size, the size of the block is determined solely by the size of the data stored therein, thus increasing the effective
- 10 data storage capacity of the memory. By allowing valid variable size blocks to be movable, when a page is updated the blocks can be rearranged on the transfer page so that the spare capacity of the page is provided in a single unused area of the page.

- 15 Preferably, the memory comprises a memory in which data is not freely writable, such as a Flash memory volume.

- A valid block may be changed to an invalid block by changing the value of a one-bit flag stored in the block, preferably in the header of the block. By changing the value of the bit from 1 to 0, that is, deleting the bit, the change of status of the block stored
- 20 in Flash memory may be performed without re-writing the entire page.

The memory may comprise a memory volume of a receiver/decoder, in which the data may be downloaded from a bitstream, preferably in the form of MPEG tables.

- 25 This aspect of the present invention also provides apparatus for transferring blocks of data between pages of memory to enable fresh data to be stored in said memory, said memory comprising a plurality of pages, one page of said memory being designated as a source page comprising at least one valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory
- 30 being designated as a transfer page, said apparatus comprising:

means, such as a central processor, for copying the or each valid block from the source page into said transfer page, at least one such block having a position in

said transfer page different from its position in the source page; and

means, such as the central processor, for erasing the source page.

5 Access to data stored in the memory of the receiver/decoder may be required by a number of parties. One such party is the author of the data, who may require access to the data to correct an error in the data or to replace the data with an upgraded version. Another such party is the provider of an interactive application which uses the data. Whilst wanting such a provider to have access to the data so as to be able to read the data, thereby enabling the interactive application to use the data, the author
10 of the data may want to prohibit the provider from over-writing the data with its own data. The provider may also want to prohibit any access to the data by, for example, the manufacturer or the owner of the receiver/decoder, thereby maintaining the confidentiality of the data to these parties.

15 The present invention seeks in a third aspect to provide a technique for restricting data access in a receiver/decoder.

In a third aspect, the present invention provides a method of restricting data access in a receiver/decoder having a memory, the method comprising the steps of:

20 assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party;

storing the data, the sets of access rights and an identifier for each party in a memory of the receiver/decoder;

25 comparing the identifier of a party requesting access to the data with the or each identifier stored in the memory; and

providing the party with the set of access rights assigned thereto in the memory of the receiver/decoder.

30 Thus, by assigning a plurality of access rights to different parties prior to storing the data in the memory of the receiver/decoder, secure segregation of data in the receiver/decoder can be afforded.

Preferably, the sets of access rights are stored in a header for the data. This can provide for convenient location of the access rights for the data. One or more identifiers for the parties may also be stored in the header for the data.

5 The data may be downloaded from a bitstream transmitted by a transmitting system, the sets of access rights and identifiers for the parties being stored within the data at the transmitting system. Thus, this aspect of the present invention extends to a method of restricting access to data broadcast in a digital broadcast system, said method comprising the steps, at a transmitting system, of:

10 assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party;

storing the sets of access rights and identifiers for the parties within the data;

and

transmitting the data;

15 and, at a receiver/decoder having a memory, the steps of:

downloading and storing the transmitted data in the memory of the receiver/decoder;

comparing the identifier of a party requesting access to the data with the identifiers stored in the memory; and

20 providing the party with the set of access rights assigned thereto in the memory of the receiver/decoder.

The data may be transmitted in any suitable form, such as in a digital datastream.

25 A further set of access rights may be assigned to at least one party whose identifier is not stored in the memory of the receiver/decoder, such a party requesting access to the data being provided with the further set of access rights. Thus, an unknown or unfavoured party may be prohibited from accessing the data by the selection of a suitable set of access rights.

30

A particular set of access rights may be assigned to one party only. Preferably, this party is the author of the data. Thus, the author of the data may be assigned a

separate set of access rights, which can enable full access to the data by the author.

A particular set of access rights may be assigned to a group of parties, identifiers for each of the members of the group being stored in the memory of the receiver/decoder.

5 Thus, by providing a set of access rights to a group of parties, the number of sets of access rights which need be assigned can be reduced.

Preferably a set of access rights is used to determine whether a party is prohibited from reading the data. A set of access rights may also be used to determine whether
10 a party is prohibited from overwriting the data.

The data may be stored in a Flash memory volume of the receiver/decoder.

This aspect of the present invention also extends to apparatus for restricting access to
15 data stored in a memory of a receiver/decoder, a plurality of sets of access rights being assigned to the data, each set of access rights being assigned to at least one party, an identifier for each party being stored in the receiver/decoder, the apparatus comprising:

means, such as a central processor, for comparing the identifier of a party requesting access to the data with the identifiers stored in the memory; and

20 means for providing the party with the set of access rights assigned thereto in the memory of the receiver/decoder. The central processor may also provide the party with its assigned set of access rights.

This aspect of the invention also provides a receiver/decoder comprising a memory for
25 storing data, a plurality of sets of access rights assigned to the data and an identifier for each party, and apparatus for restricting access to the data as aforementioned.

The receiver/decoder may further comprise a security module for storing the identifiers for the parties.

30

The receiver/decoder may further comprise a receiver for receiving a bitstream including said data, said sets of access rights and said identifiers, and means, such as

a demultiplexer and descrambler, for downloading said data, said sets of access rights and said identifiers into said memory. The receiver/decoder is preferably arranged to download MPEG tables.

5 This aspect of the present invention also provides a transmission system comprising:
means for assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party;

means for storing the access rights and identifiers for the parties within the data; and

10 means, such as a transmitter, for transmitting a bitstream including said data.
The assigning means and the storage means of the transmission system may be provided by a processing unit of the transmitting system.

The assigning means may be adapted to assign a further set of access rights to parties
15 whose identifiers are not stored in the memory of the receiver/decoder. The assigning means may also be adapted to assign a set of access rights to a group of parties, identifiers for each of the members of the group being stored in said data.

This aspect of the present invention also provides a combination of a receiver/decoder
20 as aforementioned and a transmission system as aforementioned.

Various functions of the receiver/decoder may be implemented in hardware, for example in a dedicated integrated circuit; this may provide enhanced speed of operation. Preferably, however, at least some of the functions are implemented in
25 software, preferably implemented by processing means which runs the applications; this can allow greater flexibility, require less components, and allow the receiver/decoder to be updated more readily.

Any of the above features may be combined together in any appropriate combination.
30 Apparatus features may be applied to method aspects and vice versa.

Preferred features of the present invention will now be described, by way of example,

with reference to the drawings, in which:

Figure 1 is a schematic diagram of a known arrangement of memory volumes in a receiver/decoder;

5

Figure 2 illustrates a prior arborescent organisation of data in a memory volume;

Figure 3(a) illustrates a prior process for changing the arborescence of data in a memory volume;

10

Figure 3(b) illustrates another prior process for changing the arborescence of data in a memory volume;

Figure 4 is a schematic diagram of a digital television system;

15

Figure 5 is a schematic diagram of the structure of a receiver/decoder of the system of Figure 4;

Figure 6 illustrates the arrangement of a page of Flash memory;

20

Figure 7 illustrates a header of a block of a page of Flash memory;

Figure 8 illustrates the contents of a header block of a file stored in Flash memory;

25

Figure 9 illustrates the arborescence of data stored in Flash memory;

Figure 10 illustrates the contents of the Access mode field in a header block;

30

Figure 11 is a flow diagram illustrating a method of copying a block of VALID data from one page of Flash memory to another;

Figure 12 is a flow diagram illustrating a method of copying blocks of data from one

page of Flash memory to another; and

Figure 13 illustrates the overall effect of the method illustrated in Figure 12.

5 An overview of a digital television system 1 is shown in Figure 4. The system includes a mostly conventional digital television system 2 that uses the known MPEG-2 compression system to transmit compressed digital signals. In more detail, MPEG-2 compressor 3 in a broadcast centre receives a digital signal stream (typically a stream of video signals). The compressor 3 is connected to a multiplexer and scrambler 4 by
10 linkage 5.

The multiplexer 4 receives a plurality of further input signals, assembles the transport stream and transmits compressed digital signals to a transmitter 6 of the broadcast centre via linkage 7, which can of course take a wide variety of forms including
15 telecommunications links. The transmitter 6 transmits electromagnetic signals via uplink 8 towards a satellite transponder 9, where they are electronically processed and broadcast via notional downlink 10 to earth receiver 12, conventionally in the form of a dish owned or rented by the end user. The signals received by receiver 12 are transmitted to an integrated receiver/decoder 13 owned or rented by the end user and
20 connected to the end user's television set 14. The receiver/decoder 13 decodes the compressed MPEG-2 signal into a television signal for the television set 14.

Other transport channels for transmission of the data are of course possible, such as terrestrial broadcast, cable transmission, combined satellite/cable links, telephone
25 networks etc.

In a multichannel system, the multiplexer 4 handles audio and video information received from a number of parallel sources and interacts with the transmitter 6 to broadcast the information along a corresponding number of channels. In addition to
30 audiovisual information, messages or applications or any other sort of digital data may be introduced in some or all of these channels interlaced with the transmitted digital audio and video information.

A conditional access system 15 is connected to the multiplexer 4 and the receiver/decoder 13, and is located partly in the broadcast centre and partly in the decoder. It enables the end user to access digital television broadcasts from one or more broadcast suppliers. A smartcard, capable of deciphering messages relating to commercial offers (that is, one or several television programmes sold by the broadcast supplier), can be inserted into the receiver/decoder 13. Using the decoder 13 and smartcard, the end user may purchase commercial offers in either a subscription mode or a pay-per-view mode.

As mentioned above, programmes transmitted by the system are scrambled at the multiplexer 4, the conditions and encryption keys applied to a given transmission being determined by the access control system 15. Transmission of scrambled data in this way is well known in the field of pay TV systems. Typically, scrambled data is transmitted together with a control word for descrambling of the data, the control word itself being encrypted by a so-called exploitation key and transmitted in encrypted form.

The scrambled data and encrypted control word are then received by the decoder 13 having access to an equivalent to the exploitation key stored on a smart card inserted in the decoder to decrypt the encrypted control word and thereafter descramble the transmitted data. A paid-up subscriber will receive, for example, in a broadcast monthly ECM (Entitlement Control Message) the exploitation key necessary to decrypt the encrypted control word so as to permit viewing of the transmission.

An interactive system 16, also connected to the multiplexer 4 and the receiver/decoder 13 and again located partly in the broadcast centre and partly in the decoder, enables the end user to interact with various applications via a modem back channel 17. The modem back channel may also be used for communications used in the conditional access system 15. An interactive system may be used, for example, to enable the viewer to communicate immediately with the transmission centre to demand authorisation to watch a particular event, download an application etc.

Referring to Figure 5, the elements of the receiver/decoder 13 or set-top box will now be described. The elements shown in this figure will be described in terms of functional blocks.

- 5 The decoder 13 comprises a central processor 20 including associated memory elements and adapted to receive input data from a serial interface 21, a parallel interface 22, a modem 23 (connected to the modem back channel 17 of Fig. 4), and switch contacts 24 on the front panel of the decoder.
- 10 The decoder is additionally adapted to receive inputs from an infra-red remote control 25 via a control unit 26 and also possesses two smartcard readers 27, 28 adapted to read bank or subscription smartcards 29, 30 respectively. The subscription smartcard reader 28 engages with an inserted subscription card 30 and with a conditional access unit 29 to supply the necessary control word to a demultiplexer/descrambler 30 to
- 15 enable the encrypted broadcast signal to be descrambled. The decoder also includes a conventional tuner 31 and demodulator 32 to receive and demodulate the satellite transmission before being filtered and demultiplexed by the unit 30.

In the case of received audio and video signals, the MPEG packets containing these

20 signals will be demultiplexed and filtered so as to pass real time audio and video data in the form of a packetised elementary stream (PES) of audio and visual data to dedicated audio and video processors or decoders 33, 34. The converted output from the audio processor 33 passes to a preamplifier 35 and thereafter via the audio output of the receiver/decoder. The converted output from the video processor 34 passes via

25 a graphic processor 36 and PAL/SECAM encoder 37 to the video output of the receiver/decoder.

Processing of data within the decoder is generally handled by the central processor 20. The central processor 20 provides a platform having considerable flexibility in

30 enabling an application to communicate with a variety of devices.

As used in this description, an application is a piece of computer code for controlling

-18-

high level functions of preferably the receiver/decoder 13. For example, when the end user positions the focus of remote control 25 on a button object seen on the screen of the television set 14 and presses a validation key, the instruction sequence associated with the button is run.

5

An interactive application proposes menus and executes commands at the request of the end user and provides data related to the purpose of the application. Applications may be either resident applications, that is, stored in the ROM (or Flash or other non-volatile memory) of the receiver/decoder 13, or broadcast and downloaded into the RAM or Flash memory of the receiver/decoder 13.

10

Applications are stored in memory locations in the receiver/decoder 13 and represented as resource files. The resource files comprise graphic object description unit files, variables block unit files, instruction sequence files, application files and data files, as described in more detail in the above-mentioned patent specifications.

15

With reference to Figure 1, as conventional the receiver/decoder contains memory divided into a RAM volume 54, a Flash volume 58 and a ROM volume 56, but this physical organization is distinct from the logical organization. The memory may further be divided into memory volumes associated with the various interfaces. From one point of view, the memory can be regarded as part of the hardware; from another point of view, the memory can be regarded as supporting or containing the whole of the system shown apart from the hardware.

20

The Flash memory 58 is divided into pages, typically each of many kilobytes in length. Data is stored in Flash memory in the form of blocks of data. Figure 6 illustrates the arrangement of a page of Flash memory. The page 70 comprises a header 72 of length 12 bytes, and blocks 74 of variable length. A block 74 has a size which is determined by the size of the data which is stored in the block.

25

30

The header 72 of the page 70 contains, inter alia, the number (NO 76) of the page in the Flash memory and the state (STATE 78) of the page. A page may take one of

two stable states:

- (i) an EMPTY state, when the page contains only empty blocks; and
- (ii) a VALID state, when the page contains one or more blocks of data.

5

The Flash memory 58 contains at least one page having an EMPTY state.

A page may also take one of three temporary states during the copying of the contents of one page to another page (as discussed in more detail below):

10

- (i) a WRITE state, when contents of a page are being copied to that page from another page;
- (ii) a NEW state, when copying to that page has been completed; and
- (iii) an INVALID state, when the copying of contents from that page to another page has been completed.

15

With reference to Figure 7, each block 74 includes a header 80 of length 16 bytes. The header 80 includes the following fields:

- 20 (i) an identification (ID 82) in the form of a unique number assigned to the file to which the block relates;
- (ii) the size (SIZE 84) of the block;
- (iii) the rank identification (RANK 86) of the block; and
- (iv) the status (STATUS 88) of the block.

25

RANK 86 provides a unique identifier of the block when a file is split into a plurality of blocks, each of these blocks being given a respective rank identification. The RANK 86 also serves to specify the position of the block within the file.

30 The block having a RANK=0 comprises a header block for the file. The header block does not include any of the raw data of the file, but instead includes a number of the file attributes.

Figure 8 illustrates the contents of a header block 90 of a file. The header block 90 comprises a header 80, in which RANK 86 is set to 0. The header block 90 includes a FatherID field 92. The FatherID field 92 contains the ID 82 of the "father" of the file in the arborescent structure of directories and files stored in the Flash memory 58.

5

Figure 9 illustrates an example of the arborescent structure of blocks stored in the Flash memory 58. The blocks comprise directory blocks and header blocks D, and data blocks F containing the raw data of a file. A directory block is a header block, such as block D2, which is not directly associated with a file but serves to act as a locator for other directory or header blocks.

10

Upon boot-up of the receiver/decoder, the arborescence of the data stored in the Flash memory 58 is read and an outline of the arborescence is stored in the RAM volume 54 in the form of a chart or any other convenient form. The arborescence is determined by reading the ID 82 and RANK 86 of each data block, and the ID 82, RANK 86 and FatherID 92 of each directory block and header block. For example, header block D1 has ID=1, RANK=0 and FatherID=0 (as it has no "father"). File block F3 has ID=1 and RANK=1. Directory block D4 has ID=4, RANK=0 and FatherID=1 (as its "father" is header block D1 having an ID = 1). Header block D5 has ID=5, RANK=0 and FatherID=2.

15

20

In this manner, the arborescence of the data can be quickly generated, as only up to three data fields of each block must be read to generate the arborescence.

Moreover, when a header block and associated data blocks are moved within the data arborescence, it is only necessary to write the new FatherID in the header of the header block. For example, if header block D17 and associated data blocks F20, F21 and F22 were moved so that the father of header block D17 became header block D15, it would only be necessary to amend the FatherId of header block D17 to FatherId=15. No modification of the header of previous direct ancestor of header block D17, that is, block D14, or of the header of new direct ancestor of header block D17, that is, block D15, is required.

25

30

When the arborescence of the data stored in the Flash memory changes, the chart stored in the RAM volume 54 is updated.

As discussed earlier, data may be stored in the receiver/decoder either in a single
5 memory volume or across a plurality of memory volumes. The above described
arborescent organisation of data in Flash memory, in which header blocks relate to
their father, is also applicable to data stored in ROM, RAM or any combination of
ROM, RAM and Flash memory. However, the improvements provided by this new
arborescent organisation of data are most notable in the data stored in Flash memory,
10 in which the time taken to re-write data stored therein is highest. Thus, data stored
in the RAM and ROM memory may alternatively be stored in the Flash memory with
the prior arborescent arrangement described with reference to Figures 2 and 3.

Referring back to Figure 8, header block 90 includes an Attributes field 93 which
15 indicates whether the block is a directory block or a header block.

Header block 90 includes Access mode field 94, Owner field 96 and Group field 98.
These three fields enable access to the file by various parties to be partially or fully
restricted.

20

The Owner field 96 contains an identification ID of the author of the file. The Group
field 98 contains a group identification ID for authorised users of the file. For
example, if the file relates to a program for a smartcard reader, the authorised users
of the file will include the providers of interactive applications which utilise the
25 program. The identification IDs of each authorised user of the file are stored in a
security module in the receiver/decoder.

The contents of the Access mode field 94 determine the extent to which access to the
file is permitted by the author of the file, as specified in the Owner field 96, an
30 authorised user of the file, as specified in the Group field 98, and others, such as the
manufacturer of the receiver/decoder and a user of the receiver/decoder.

Figure 10 illustrates the Access mode field 94 in more detail. The field 94 comprises six bits, two bits 100, 102 assigned to the author, two bits 104, 106 assigned to the authorised users, and two bits 108 and 110 assigned to others. The values of bits 100, 104 and 108 determine whether reading of the file is prohibited by the author, the authorised users and other respectively, and the values of bits 102, 106 and 110 determine whether overwriting of the file is prohibited by the author, the authorised users and other respectively. In the example shown in Figure 10, overwriting of the file by authorised users is prohibited, as is any reading or overwriting of the file by others.

The contents of the Access mode field 94, Owner field 96 and Group field 98 are set prior to the storage of the file in the receiver/decoder. If the file is to be transmitted to the receiver/decoder by the transmitter 6 of the broadcast centre, the contents of the aforementioned fields may be set in the broadcast centre prior to transmission. Alternatively, the contents of these fields may be set by the author upon writing the file.

When access to a file is required, the accessor identifies itself with its identification ID. The central processor 50 determines whether the ID of the accessor corresponds with the ID stored in the Owner field 96. If so, the accessor is identified as the author of the file who is assigned with the set of access rights contained in bits 100 and 102. In the example shown in Figure 10, reading and overwriting of the file by the author is permitted by the central processor 50.

If the accessor is not the author of the file, the central processor 50 refers to the security module to determine whether the ID of the accessor is a member of the group of authorised users specified in the Group field 98. If so, the accessor is identified as an authorised user of the file who is assigned with the set of access rights contained in bits 104 and 106. In the example shown in Figure 10, the authorised user is permitted only to read the file by the central processor 50.

If the accessor is not an authorised user of the file, then the accessor is identified as

an "other" who is assigned with the set of access rights contained in bits 108 and 110. In the example shown in Figure 10, any access to the file by the accessor is prohibited by the central processor.

5 The values of the bits 100 to 110 can only be changed by overwriting of the file. In the example shown in Figure 10, only the author of the file is permitted to overwrite the file. Thus, the provision of the Access mode field 94, the Owner field 96 and the Group field 98 in the header block 90 of the file provides for a simple but yet effective security system for the file.

10

With reference to Figure 8, the header block 90 also includes a Version field 112 which contains the version number of the file, and a Name field 114 which contains the name of the file in ASCII code.

15 Referring back to Figure 7, the STATUS field 88 of a block of a page of the Flash memory may take one of three stable states:

- (i) a FREE state, when the block is empty; and
- (ii) an INVALID state, when a new version of the block has been copied to
20 another page of the Flash memory, or when the file has been deleted; and
- (iii) a VALID state, when a previous version of the block has been set to an INVALID state.

The STATUS field 88 of a block includes a one-bit flag which indicates whether the
25 block is VALID or INVALID. If this one-bit flag has a value of 1, the block is VALID, and if the flag has a value of 0, the block is INVALID. Therefore, when the status of a block is to be changed from VALID to INVALID, this one bit is deleted. Thus, in Flash memory, this change of status of a block can be recorded without having to re-write the entire page of Flash memory.

30

Only usually the last block of the page is in the FREE state, and represents the amount of memory space available for storing fresh data in that page.

A block may also take one of three temporary states during the writing of the contents of the block, or the copying of the contents of the block, via RAM, to another page (as discussed in more detail below):

- 5 (i) a CREATE state, when the header of the block is being written;
- (ii) a WRITE state, when the remainder of the contents of the block is being written; and
- (iii) a NEW state, when the block has been completed but writing or copying of additional blocks of the file has yet to be completed.

10

Figure 11 illustrates the process of copying a single VALID block of a first page to a FREE block in a second page. In step 100, the state of the FREE block in the second page is changed to CREATE whilst the header of the VALID block is being copied, via RAM, into that block. In step 102, the state of the CREATE block is changed to WRITE whilst the contents of the VALID block is being copied. In step 15 104, the state of the WRITE block is changed to NEW when the copying of the contents of the block has been completed. In step 106 the state of the copied VALID block of the first page is changed to INVALID. Finally, in step 108 the state of the NEW block in the second page is changed to VALID.

20

By assigning a NEW state, rather than a VALID state, to the WRITE block in step 104 when the copying of the contents of the block has been completed, it is ensured that no two VALID blocks have the same ID and RANK at the same time. This removes the possibility of two such VALID blocks existing if the operating system were to crash between steps 104 and 106.

25

If such a crash were to occur during copying of a data block from one page of Flash memory to another, on start-up the operating system checks for the presence of any NEW blocks in the Flash memory. If a NEW block is located, the operating system searches for a VALID block having the same RANK and ID. If such a VALID block is located, the status of the NEW block is changed to INVALID, if not, the status of the NEW block is changed to VALID. This ensures that no two VALID and FREE

30

blocks having the same RANK and ID are retained in the memory without having to re-write either of the pages of Flash memory.

When a plurality of VALID blocks having the same ID are to be copied from a first page to a second page, copying of the first VALID block is suspended after step 104 has been completed. Copying of each of the subsequent VALID blocks is the performed in turn up to step 104. Then, the states of all of the copied VALID blocks of the first page are changed to INVALID, and the states of the NEW blocks in the second page changed to VALID.

If a crash were to occur during copying of the plurality of data blocks from one page of Flash memory to another, on start-up the operating system checks for the presence of any NEW blocks in the Flash memory. If a plurality of NEW blocks is located, the operating system searches for corresponding VALID and INVALID blocks having the same RANK and ID. If all of the corresponding blocks are VALID, the state of each of the NEW block is changed to INVALID. If not, that is, the state of at least one of the corresponding blocks is INVALID, the state of each of the remaining corresponding VALID blocks is changed to INVALID and then the state of each of the NEW blocks is changed to VALID.

As mentioned earlier, one of the pages of Flash memory is maintained in an EMPTY state. In time, all of the remaining pages of Flash memory will become full with VALID and INVALID blocks of data, and so it will become necessary to effectively delete one or more of the blocks of INVALID data to provide enough space for a block containing fresh data. However, party blocks of data cannot be overwritten with new data; an entire page of Flash memory must be erased to enable that page to be re-used.

In order to provide enough space for a new file to be written in Flash memory, in overview the VALID blocks only of a VALID page are copied, via RAM, to an EMPTY page, the INVALID blocks of the VALID page not being copied to the EMPTY page. The VALID blocks are copied in such a manner that at least one of

the blocks has a position in the EMPTY page which is different from its position in the VALID page. For example, the VALID blocks may be copied to the top of the EMPTY page. By rearranging the VALID blocks upon copying, the largest unfragmented memory area in the EMPTY page may be created, thereby leaving
5 enough room, for example, at the foot of the page to store the fresh data. The contents of the VALID page are erased, the EMPTY page becomes a VALID page and the previous VALID page becomes the EMPTY page.

10 A method of "cleaning" the contents of the Flash memory when fresh data is to be stored in the Flash memory is described in more detail below, with reference to Figures 12 and 13.

In step 200, the central processor 50 reviews the headers 80 of each of the blocks 74 of each of the VALID pages of the Flash memory in order to identify the VALID
15 page in which the cumulative size of the INVALID blocks is the greatest.

In step 202, the identified VALID page is selected.

20 In step 204, the status of the empty page is changed from EMPTY to WRITE, and the number of the selected VALID page is stored temporarily in the header of the WRITE page.

In step 206, the central processor 50 determines whether there are any VALID blocks in the VALID page. If there are one or more VALID blocks in the VALID page, in
25 step 208, the first VALID block is copied, via RAM, into the WRITE page.

In step 210, the central processor 50 determines whether there are any more VALID blocks in the VALID page. If there is a second VALID block, in step 212 the second VALID block is copied, via RAM, into the WRITE page directly beneath the VALID
30 block previously copied into the WRITE page.

Steps 210 and 212 are repeated as necessary until the central processor 50 determines

that there are no more VALID blocks in the VALID page. Then, in step 214, the status of the WRITE page is changed to NEW. In step 216, the status of the VALID page is changed to INVALID. In step 218, the status of the NEW page is changed to VALID, and finally in step 220, the INVALID page is erased and the status of the
5 erased page changed to EMPTY, so that there is once again at least one EMPTY page of Flash memory.

The overall effect of the above method is summarised in Figure 13. In this preferred embodiment, the VALID blocks V of the VALID page are effectively moved to the
10 top of the EMPTY page in order to provide storage space in the EMPTY page for fresh data at the foot of the page, once the status of the EMPTY page has been changed to VALID.

It will be understood that the present invention has been described above purely by
15 way of example, and modifications of detail can be made within the scope of the invention. Each feature disclosed in the description, and (where appropriate) the claims and drawings may be provided independently or in any appropriate combination.

CLAIMS

1. A method of restricting data access in a receiver/decoder having a memory, the method comprising the steps of:

5 assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party;

storing the data, the sets of access rights and an identifier for each party in a memory of the receiver/decoder;

10 comparing the identifier of a party requesting access to the data with the or each identifier stored in the memory; and

providing the party with the set of access rights assigned thereto in the memory of the receiver/decoder.

15 2. A method according to Claim 1, wherein the sets of access rights are stored in a header for the data.

3. A method according to Claim 1 or 2, wherein the identifiers for the parties are stored in a header for the data.

20 4. A method according to any preceding claim, wherein the data is downloaded from a bitstream transmitted by a transmitting system, the sets of access rights and identifiers for the parties being stored within the data at the transmitting system.

25 5. A method of restricting access to data broadcast in a digital broadcast system, said method comprising the steps, at a transmitting system, of:

assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party;

storing the sets of access rights and identifiers for the parties within the data;
and

30 transmitting the data;

and, at a receiver/decoder having a memory, the steps of:

downloading and storing the transmitted data in the memory of the

receiver/decoder;

comparing the identifier of a party requesting access to the data with the identifiers stored in the memory; and

providing the party with the set of access rights assigned thereto in the memory
5 of the receiver/decoder.

6. A method according to Claim 5, wherein the data is transmitted in a digital datastream.

10 7. A method according to any preceding claim, in which a further set of access rights is assigned to at least one party whose identifier is not stored in the memory of the receiver/decoder, such a party requesting access to the data being provided with the further set of access rights.

15 8. A method according to any preceding claim, wherein a particular set of access rights is assigned to one party only, preferably the author of the data.

9. A method according to any preceding claim, wherein a particular set of access rights is assigned to a group of parties, identifiers for each of the members of the
20 group being stored in the memory of the receiver/decoder.

10. A method according to any preceding claim, wherein a set of access rights is used to determine whether a party is prohibited from reading the data.

25 11. A method according to any preceding claim, wherein a set of access rights is used to determine whether a party is prohibited from overwriting the data.

12. A method according to any preceding claim, wherein the data is stored as files and directories in the memory of the receiver/decoder.

30

13. A method according to Claim 12, wherein the arborescence of the files and directories is recorded in the memory of the receiver/decoder.

14. A method according to Claim 13, wherein an identifier of the directory, if any, immediately preceding a file or directory in the arborescence of the data is stored in association with that file and directory.

5 15. A method according to Claim 14, wherein the identifier is stored in a header of that file or directory.

16. A method according to any preceding claim, wherein the data is stored in a Flash memory volume of the receiver/decoder.

10

17. Apparatus for restricting access to data stored in a memory of a receiver/decoder, a plurality of sets of access rights being assigned to the data, each set of access rights being assigned to at least one party, an identifier for each party being stored in the receiver/decoder, the apparatus comprising:

15 means for comparing the identifier of a party requesting access to the data with the identifiers stored in the memory; and

means for providing the party with the set of access rights assigned thereto in the memory of the receiver/decoder.

20 18. A receiver/decoder comprising a memory for storing data, a plurality of sets of access rights assigned to the data and an identifier for each party, and apparatus for restricting access to the data as claimed in Claim 17.

19. A transmission system comprising:

25 means for assigning a plurality of sets of access rights to the data, each set of access rights being assigned to at least one party; -

means for storing the access rights and identifiers for the parties within the data; and

means for transmitting a bitstream including said data.

30

20. A combination of a receiver/decoder according to Claim 18 and a transmission system according to Claim 19.

21. A method of recording the arborescence of data stored as files and directories, said method comprising the step of storing in association with each file and directory an identifier of the directory, if any, immediately preceding that file or directory in the arborescence of the data.

5

22. A method according to Claim 21, wherein the identifier comprises a unique code assigned to the directory.

10

23. A method according to Claim 21 or 22, wherein the identifier is stored in a header of the file or directory.

24. A method according to Claim 23, wherein at least part of the data is stored in a Flash memory volume, preferably wholly within the Flash memory volume.

15

25. A method according to Claim 24, wherein a virtual arborescence of the data stored in the Flash memory volume is created and stored in a RAM memory volume.

20

26. A method according to Claim 24 or 25, wherein the header of a file stored in the Flash memory volume is stored in a dedicated block of Flash memory.

25

27. A method according to any of Claims 21 to 26, wherein the stored identifier is changed when a file or directory is moved to immediately precede another directory.

25

28. A method according to any of Claims 21 to 27, wherein the data is stored in a receiver/decoder.

30

29. Apparatus for recording the arborescence of data stored as files and directories, said apparatus comprising means for storing in association with each file and directory an identifier of the directory, if any, immediately preceding that file or directory in the arborescence of the data.

30. A receiver/decoder comprising apparatus according to Claim 29.

31. A method of transferring blocks of data between pages of memory to enable fresh data to be stored in said memory, said memory comprising a plurality of pages, one page of said memory being designated as a source page comprising at least one valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory being designated as a transfer page, the method comprising the step of:

copying the or each valid block from the source page into said transfer page, at least one such block having a position in said transfer page different from its position in the source page; and
erasing the source page.

32. A method according to Claim 31, wherein the data is subsequently stored next to the copied valid blocks in the transfer page.

33. A method of storing data in memory, said memory comprising a plurality of pages, one page of said memory comprising a source page comprising at least one valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory being designated as a transfer page initially comprising only free blocks, the method comprising the steps of:

copying the or each valid block from the source page into said transfer page, at least one such block having a position in said transfer page different from its position in the source page;
erasing the source page; and
storing the data in said transfer page.

34. A method according to any of Claims 31 to 33, wherein the or each valid block is copied into the transfer page in such a manner as to create the largest unfragmented memory area in the transfer page for receiving the fresh data.

35. A method according to any of Claims 31 to 34, wherein the erased source page is redesignated as a new transfer page, preferably immediately after erasure thereof.

36. A method according to any of Claims 31 to 35, wherein a page is designated as a source page in dependence on the cumulative size of the invalid blocks of the page.

5 37. A method according to Claim 36, wherein the source page is a page having at least one invalid block, said at least one invalid block having a cumulative size equal to or greater than the size of the fresh data.

10 38. A method according to any of Claims 31 to 37, wherein the blocks have a variable size.

39. A method according to any of Claims 31 to 38, wherein the memory comprises a memory in which data is not freely writable, preferably a Flash memory volume.

15 40. A method according to Claim 39, wherein a valid block is changed to an invalid block by changing the value of a one-bit flag stored in that block.

20 41. A method according to Claim 40, wherein the one-bit flag is stored in the header of that block.

42. A method according to any of Claims 31 to 41, wherein the memory comprises a memory volume of a receiver/decoder.

25 43. A method according to Claim 42, wherein the data is downloaded from a bitstream.

44. A method according to Claim 43, wherein the data is formatted in the form of MPEG tables.

30 45. Apparatus for transferring blocks of data between pages of memory to enable fresh data to be stored in said memory, said memory comprising a plurality of pages, one page of said memory being designated as a source page comprising at least one

valid block containing valid data and at least one invalid block containing invalid data, and at least one of the pages of memory being designated as a transfer page, said apparatus comprising:

5 means for copying the or each valid block from the source page into said transfer page, at least one such block having a position in said transfer page different from its position in the source page; and

means for erasing the source page.

10 46. A receiver/decoder comprising apparatus according to Claim 45.

47. A method of restricting data access in a receiver/decoder substantially as herein described with reference to the accompanying drawings.

15 48. A method of restricting access to data broadcast in a digital broadcast system substantially as herein described with reference to the accompanying drawings.



49. Apparatus for restricting access to data stored in a memory of a receiver/decoder substantially as herein described with reference to the accompanying drawings.

20 50. A transmission system substantially as herein described with reference to the accompanying drawings.



25 51. A method of, or apparatus for, recording the arborescence of data stored as files and directories substantially as herein described.

52. Apparatus for, or a method of, transferring blocks of data between pages of memory substantially as herein described with reference to the accompanying drawings.

30 53. A method of storing data in memory substantially as herein described with reference to the accompanying drawings.

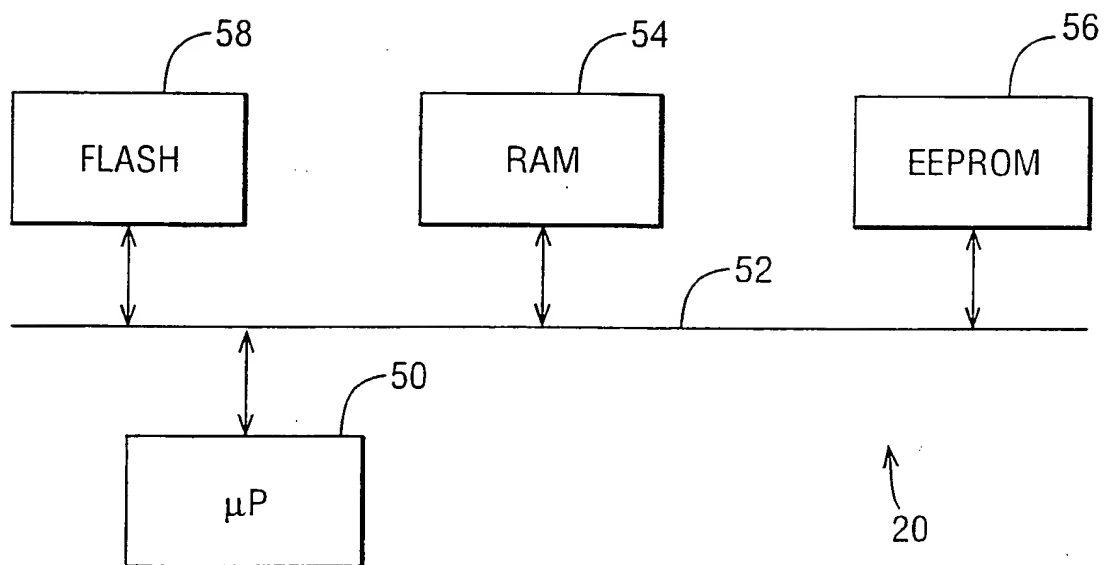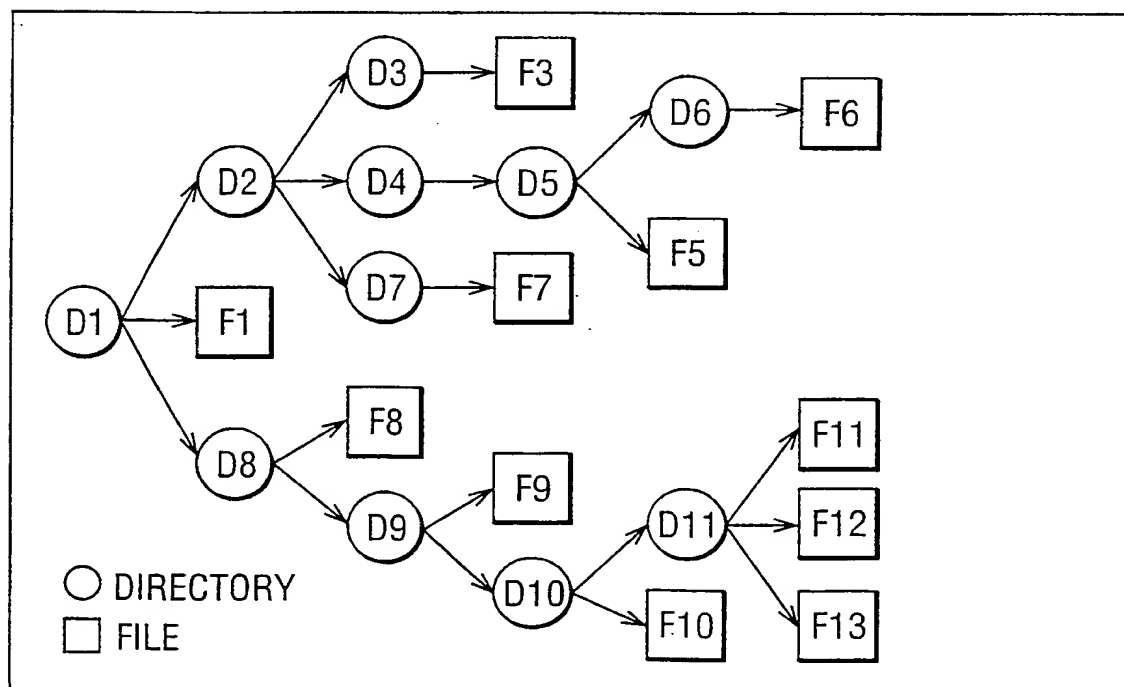FIG. 1 (PRIOR ART)**FIG. 2** (PRIOR ART)

THIS PAGE BLANK (USPTO)

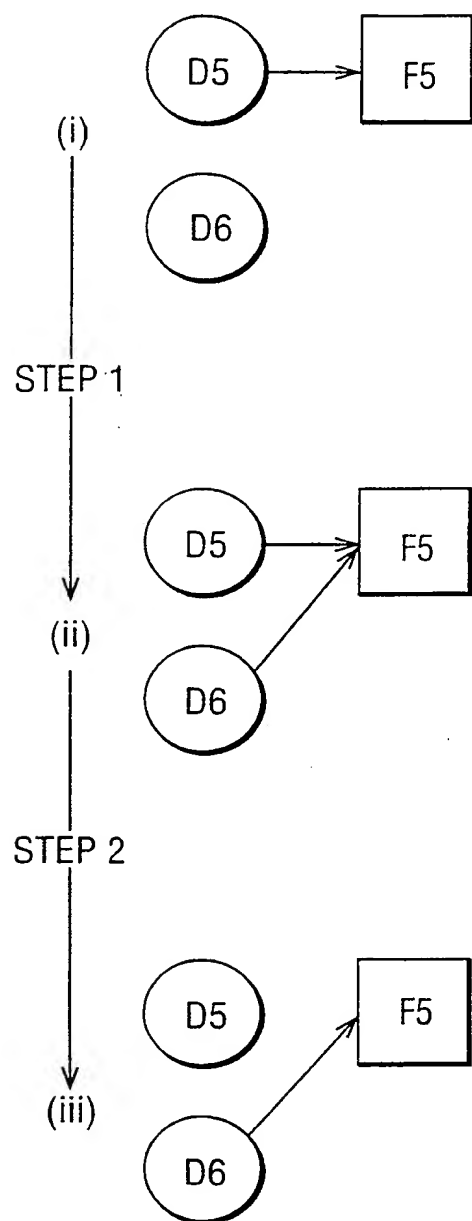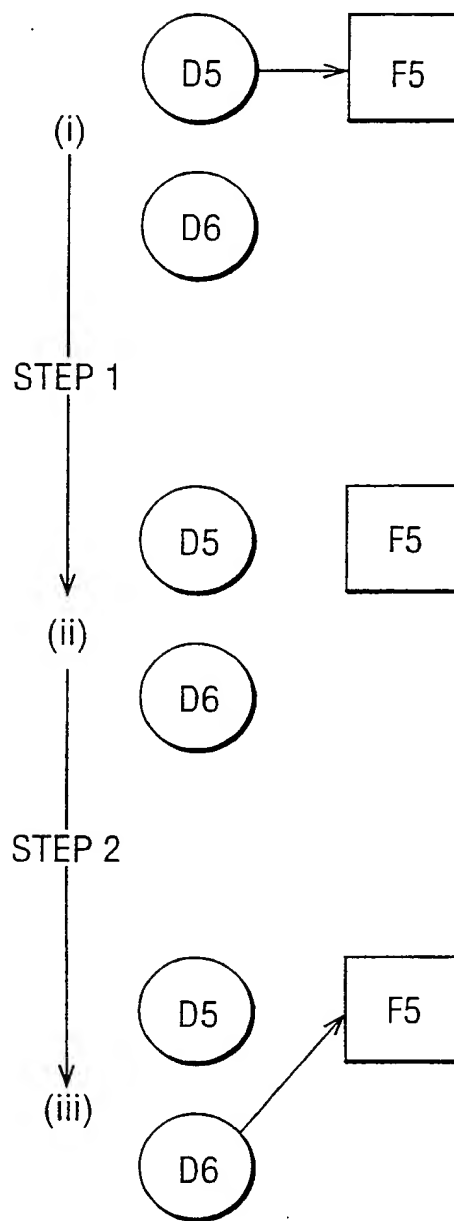FIG. 3(a) (PRIOR ART)**FIG. 3(b)** (PRIOR ART)

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

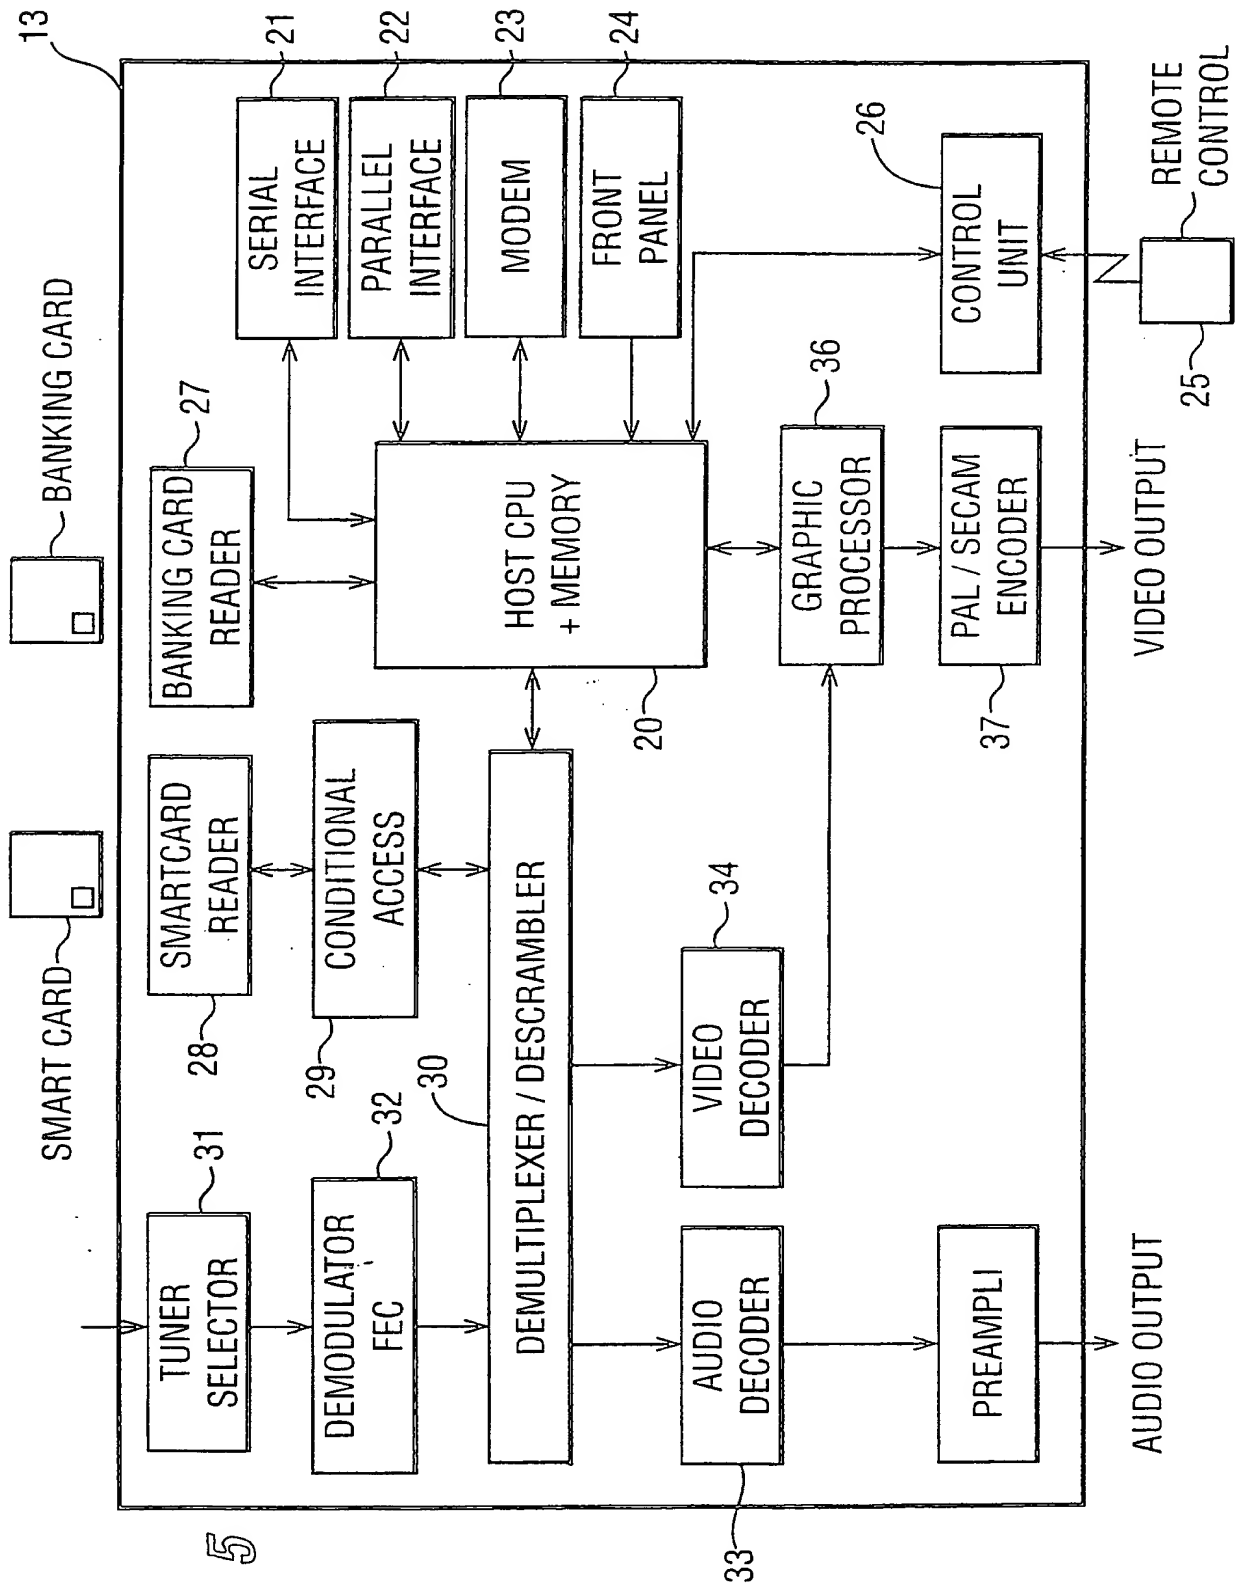


FIG. 5

THIS PAGE BLANK (USPTO)

FIG. 6

Diagram of a table structure. The table has a header row with three columns. The first column is labeled 'No' (76) and the second column is labeled 'STATE' (78). The third column is labeled with reference numeral 72. The entire table structure is labeled with reference numeral 70. Below the header row, there are four empty rows, each labeled with reference numeral 74 on the right side.

| No | STATE | |
|----|-------|--|
| | | |
| | | |
| | | |
| | | |

FIG. 7

Diagram of a table structure. The table has a header row with four columns. The first column is labeled 'ID' (82), the second column is labeled 'SIZE' (84), the third column is labeled 'RANK' (86), and the fourth column is labeled 'STATUS' (88). The entire table structure is labeled with reference numeral 80. Below the header row, there is one large empty row, labeled with reference numeral 74 on the left side.

| ID | SIZE | RANK | STATUS |
|----|------|------|--------|
| | | | |

THIS PAGE BLANK (USPTO)

FIG. 8


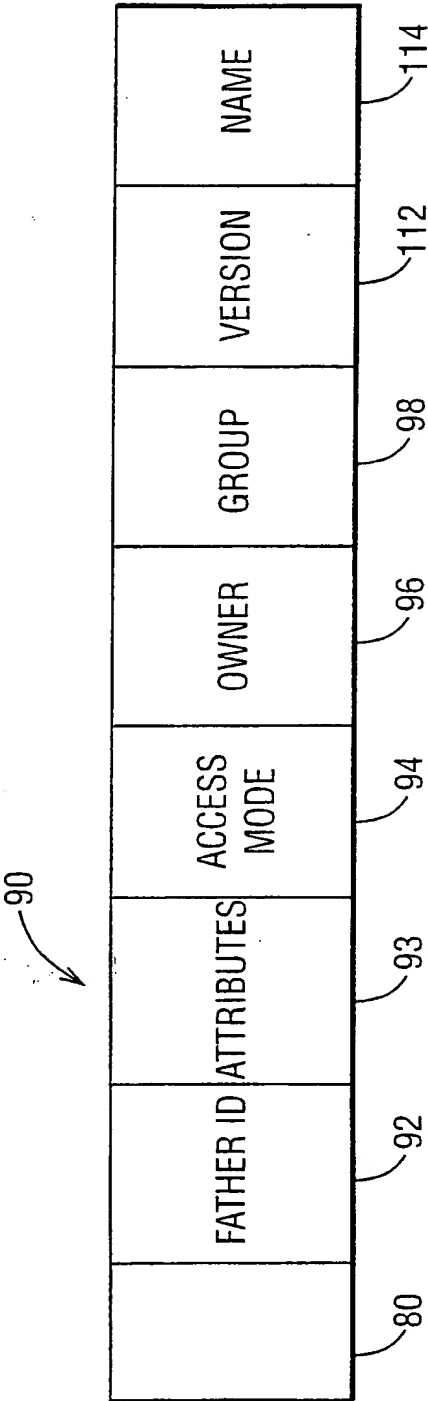



FIG. 10

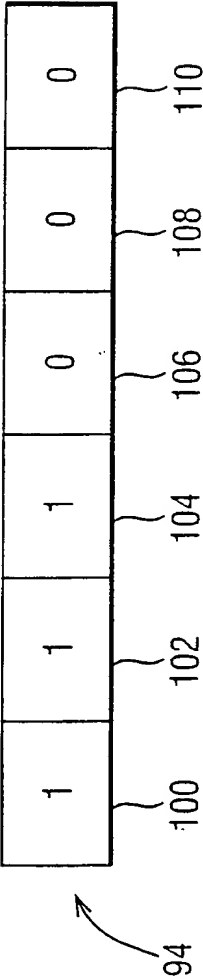

THIS PAGE BLANK (USPTO)

7/9

FIG. 9

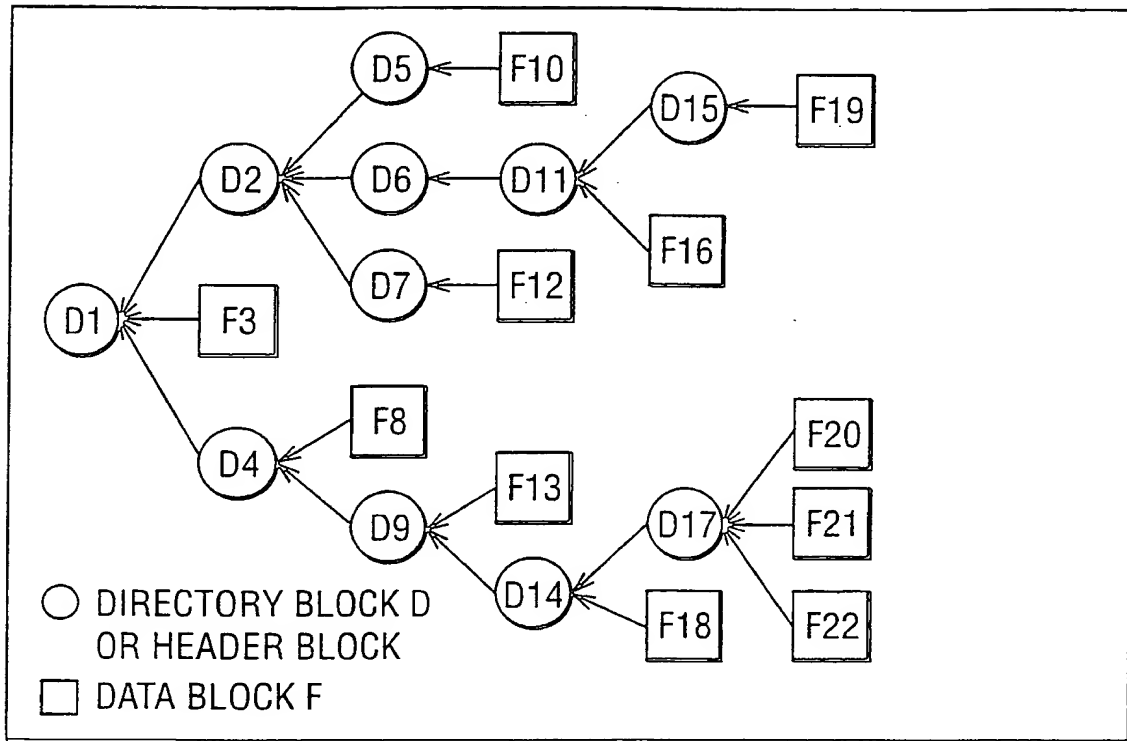


58

FIG. 11

| | STATE OF BLOCK IN FIRST PAGE | STATE OF BLOCK IN SECOND PAGE |
|----------|---------------------------------|----------------------------------|
| STEP 100 | VALID | FREE |
| STEP 102 | VALID | CREATE |
| STEP 104 | VALID | WRITE |
| STEP 106 | INVALID | NEW |
| STEP 108 | INVALID | VALID |


THIS PAGE BLANK (USPTO)

8/9

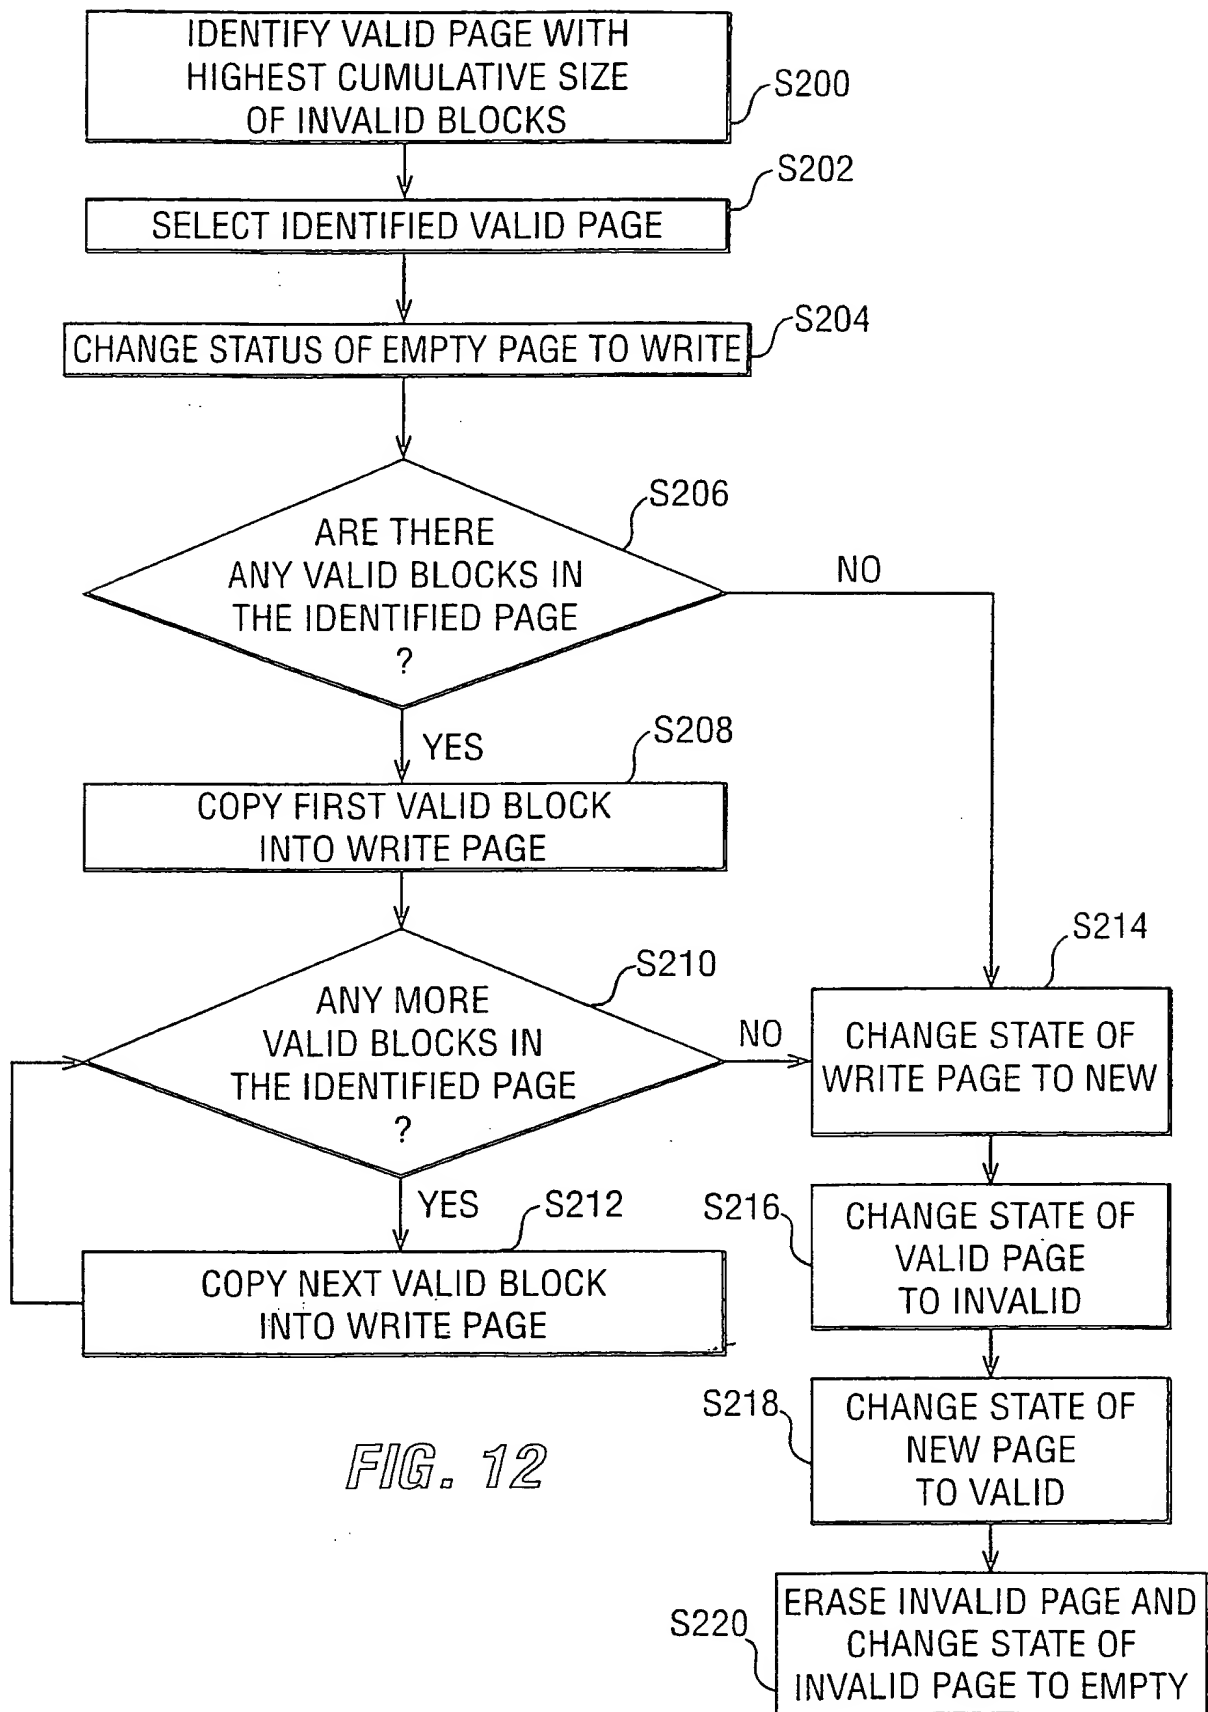

THIS PAGE BLANK (USPTO)

FIG. 13

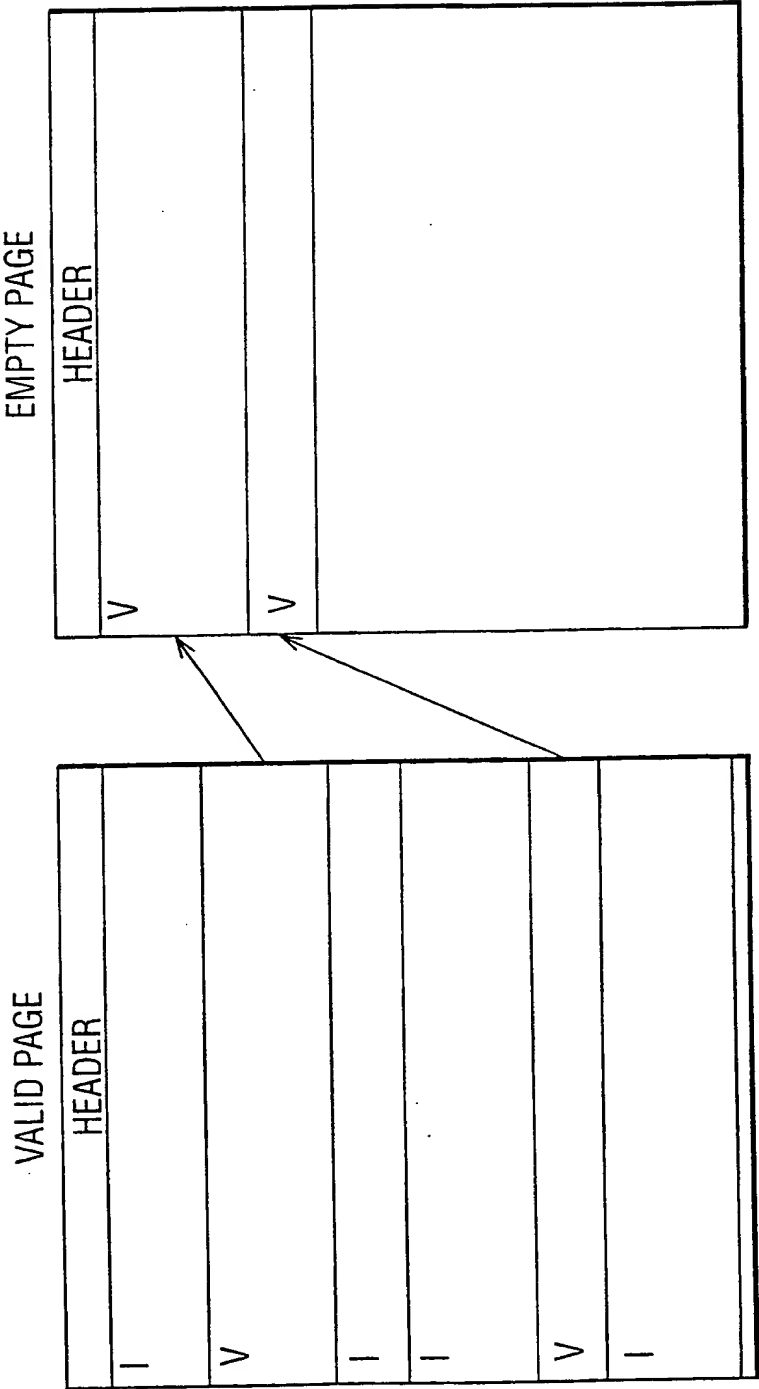

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 99/01584

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|----------------------------|
| X A | DE 195 11 298 A (DEUTSCHE TELEKOM AG) 2 October 1996 (1996-10-02) column 1, line 8 -column 4, line 1 figures 1,2 | 1,5,7, 9-13,17 21-46 |
| A | EP 0 809 401 A (PHILIPS ELECTRONICS NV) 26 November 1997 (1997-11-26) page 2, column 2, line 36 -page 4, column 5, line 22 figure 1 | 1-46 |
| A | EP 0 820 193 A (PHILIPS ELECTRONICS NV) 21 January 1998 (1998-01-21) page 2, column 2, line 33 -page 4, column 5, line 6 figures 1-3 | 1-46 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

3 November 1999

Date of mailing of the international search report

09/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Van der Zaal, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 99/01584

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|-------------------------------|--------------------------|
| DE 19511298 | A | 02-10-1996 | NONE | |
| EP 0809401 | A | 26-11-1997 | FR 2749118 A JP 10056631 A | 28-11-1997 24-02-1998 |
| EP 0820193 | A | 21-01-1998 | FR 2751449 A JP 10117336 A | 23-01-1998 06-05-1998 |